




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

PCT/IB 03 / 02386  
1. 06. 03

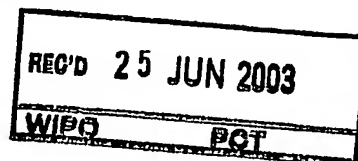

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02077474.1

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**BEST AVAILABLE COPY**



Anmeldung Nr.:  
Application no.: 02077474.1  
Demande no:

Anmeldetag:  
Date of filing: 21.06.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Magnetic resonance imaging apparatus and method

In Anspruch genomene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G01R33/20

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

## Magnetic resonance imaging apparatus and method

EPO - DG 1  
21.06.2002  
(54)

The present invention relates to a magnetic resonance imaging (MRI) apparatus comprising an RF coil system comprising M RF coils for detecting RF signals from a region of interest, M being an integer larger than 2, and N receiver channels for receiving and processing the detected RF signals, N being an integer larger than 1 and smaller than M.

5 The invention also relates to a magnetic resonance imaging (MRI) method comprising the steps of detecting RF signals from a region of interest using an RF coil system comprising M RF coils, M being an integer larger than 2, and receiving and processing the detected RF signals using N receiver channels, N being an integer larger than 1 and smaller than M.

10 An MRI apparatus and an MRI method of the kinds mentioned in the opening paragraphs are generally known and widely used. A magnet is used for generating a temporarily constant, uniform magnetic field through an examination region, and a radio frequency (RF) unit comprising an RF coil system is used for transmitting RF signals into the examination region to induce and manipulate magnetic resonance of dipoles disposed in the examination region and/or for receiving RF signals from the dipoles disposed in the examination region.

15 The article "SENSE: Sensitivity Encoding For Fast MRI", Klaas P. Pruessmann et al., Magnetic Resonance In Medicine 42:952-962 (1999) describes a concept for considerably enhancing the performance of magnetic resonance imaging by means of arrays of multiple receiver coils. Therein sensitivity encoding (SENSE) is described which is based on the fact that receiver sensitivity generally has an encoding effect complementary to Fourier preparation by linear field gradients. By making use of an array of multiple receiver coils scan time can be reduced and resolution can be increased. The described method takes advantage of undersampling or reduction of k-space samples and known individual coil sensitivity profiles. Since sampling is performed with a step size larger than prescribed by the Nyquist theorem, the so-called foldover occurs during the (always necessary) Fourier

20

25

transformation, so that in principle two different points from the physical image space cannot be distinguished from one another.

In practise, the anatomical region to be examined is asking for more coil elements and receiver channels that are provided as hardware in the MRI apparatus. An MRI apparatus produced and sold by Philips, the Gyroscan NT which is also used in practise, can handle up to six synergy/phased array coils simultaneously by use of six receiver channels. But certain applications could ask for more receiver channels and RF coils. If there are more RF coils than receiver channels it is necessary to select coils for allocation to the available receiver channels. A larger number of receiver channels is possible in principle and would lead to shorter acquisition times or higher resolutions. But each additional receiver channel increases the costs of an MRI apparatus considerably, and each change in the number of receiver channels necessitates a redesign of the entire system because more bandwidth is required then.

It is common art for an RF coil system having e.g. eight RF coils to map these onto four receiver channels by combining RF signals from opposite RF coils in quadrature mode. However, such a combination is not optimal for the above mentioned SENSE method as points in space that have to be unfolded when applying the SENSE reduction are encoded equally in one single receiver channel.

20

It is an object of the present invention to provide a magnetic resonance imaging (MRI) apparatus and a magnetic resonance imaging (MRI) method of the kinds mentioned in the opening paragraphs which are optimized for the SENSE method and which allow a cheap, robust and reliable support of MRI apparatus, having less receiver channels than elements in the RF coil system.

In order to achieve this object a magnetic resonance imaging apparatus and a magnetic resonance imaging method according to the present invention are characterized in that at least two RF coils are combined for reception of RF signals of said RF coils with a single receiver channel, wherein said at least two RF coils are selected so as to provide maximum spatially varying coil sensitivities along the principal axis for coil sensitivity encoding.

The present invention is based on the idea to select the combination of RF signals from RF coils by use of the knowledge of the preferred orientation of scanning and/or

THE INVENTION IS BASED ON THE IDEA TO SELECT THE COMBINATION OF RF SIGNALS FROM RF COILS BY USE OF THE KNOWLEDGE OF THE PREFERRED ORIENTATION OF SCANNING AND/OR

sensitivity profiles to encode for spatial information. Data from several points in space will coincide in the under-encoded image. To facilitate SENSE unfolding the sensitivities at the points to which the data has to be unfolded should be as distinct as possible. This is best achieved when the individual RF coils or coil-combinations probe the examination object, e.g. a patient or a part of a patient, in an as different a way as possible. Preferably, a fixed combination is selected to downscale the number of RF coils  $M$  to the number of receiver channels  $N$  based upon insights regarding anatomy and preferred imaging planes/orientations and related foldover/SENSE folding directions; i.e. a combination is preferably selected in dependence on the preferred coil sensitivity encoding axis for the majority of examinations to be performed with the RF coil system.

A particular embodiment of a magnetic resonance imaging apparatus according to the invention is characterized in that pairs of two RF coils are each combined and connected to a separate receiver channel, wherein at least one RF coil is not combined with any other RF coil. It has been shown in practise that such an embodiment, where one or more RF coils remain individual so that the received RF signals thereof are not combined with RF signals from one or more other RF coils into a common receiver channel results in a better signal-to-noise ratio (SNR).

A particular embodiment of a magnetic resonance imaging apparatus according to the invention is characterized in that the RF coil system comprises 8 RF coils and the MRI apparatus comprises 6 receiver channels, wherein two pairs of two RF coils are each combined with two receiver channels, while the four remaining RF coils are connected to the four remaining receiver channels. Such an RF coil system is preferably applied for scanning the head of a patient, the 8 RF coils being preferably arranged around the head in the form of a bird cage. Another application is cardiac imaging where two rings of four RF coils are each arranged around the body of a patient. Advantageous embodiments of such MRI apparatuses and, in particular, advantageous combinations of RF coils for such applications are defined in claims 3 to 10 and will be explained in more detail with reference to the figures below. However, the invention is not restricted to these particular embodiments but can be applied to any other MRI apparatus comprising more RF coils than receiver channels.

In the following particular embodiments of the invention will be explained in more detail with reference to the drawings, in which:

Fig. 1 shows a diagram explaining the SENSE method in general,

Fig. 2 shows an embodiment of a known head coil arrangement,

Fig. 3 schematically shows a first embodiment of an RF coil system according to the invention,

5 Fig. 4 schematically shows a second embodiment of an RF coil system according to the invention,

Fig. 5 schematically shows a third embodiment of an RF coil system according to the invention, and

10 Fig. 6 schematically shows a fourth embodiment of an RF coil system according to the invention.

Fig. 1 shows a diagram explaining several terms used for describing the invention. Therein a two-dimensional cartesian grid is shown which grid is arranged in the z-y-direction. The z-direction can be regarded as slice selection direction, and the y-direction can be regarded as phase encoding direction. The known method makes use of sensitivity encoding and takes advantage of under sampling or reduction of k-space samples and known individual coil sensitivity profiles. The field of view (FOV) 1 is thus reduced in both dimensions. A pixel 3 in the reduced FOV 2 represents the superposition of pixels forming a cartesian grid. In the example shown in Fig. 1 four of these pixels are in the full FOV 1. Thus the actual degree of aliasing is four. Aliased pixels are thereby created in the individual coil reconstructed images, which can, however, be unfolded by making use of the different sensitivity profiles of each coil. There are a few constraints on this. Reduction of k-space samples using SENSE and subsequent effective unfolding of the image can only be achieved in the direction of multiple receiver coils, i.e. in the reduction direction. The SENSE reconstruction algorithm will unfold the image. Aliasing or foldover artefacts are thus created in the same direction, i.e. in the foldover direction.

Fig. 2 shows an embodiment of a known RF coil system comprising 8 RF coils 11-18, which are arranged around the head 4 of a patient in the form of a bird cage, and additional known means for selecting and combining the RF signals from these 8 RF coils 11-18 into four receiver channels C<sub>1</sub>, C<sub>2</sub>, C<sub>3</sub>, C<sub>4</sub>. As can be seen the RF signals from each individual RF coil 11-18 are first preamplified by a preamplifier 5, then phase shifted by a phase shifter 6 before the RF signals of pairs of two RF coils are combined by an RF

combiner 7. The signals of the four receiver channels are then processed by an RF processor 8.

signals of RF coils arranged on opposite sides of the head 4 are combined into one receiver channel, i.e. RF signals from RF coils 11 and 15 are combined into receiver channel C1, RF signals from RF coils 12 and 16 are combined into receiver channel C2, RF signals from RF coils 13 and 17 are combined into receiver channel C4 and RF signals from RF coils 14 and 18 are combined into receiver channel C3. This results in one set of LR (=left/right) coils 11, 15, one set of AP (=anterior/posterior) coils 13, 17 and two sets of coils 12, 16 and 14, 18 being arranged obliquely to the AP and LR direction.

The RF coil system shown in Fig. 2 is not optimal for the SENSE method since points in space that have to be unfolded when applying the SENSE reduction are encoded in one single receiver channel not adequately showing different complex coil sensitivity patterns to enable unfolding. It is therefore proposed, according to the present invention, to combine the RF signals from RF coils in such a way that maximum spatially varying coil sensitivities are provided along the principle axes for coil sensitivity encoding. This means that, according to the invention, a fixed combination of RF signals from RF coils is chosen according to the insight or knowledge of the preferred main orientation of scanning and SENSE reduction direction in the anatomy of primary interest. As much individuality should as possible be provided along the preferred or actual SENSE reduction direction. Particular embodiments of such combinations are schematically illustrated in Figs. 3 to 6.

The embodiments are discussed using the anatomy of the brain. Here, at least on cylindrical systems, the majority of scans employ a foldover direction LR (approximately 70%), followed by AP (approximately 20%, especially EPI). Given the strong preference for certain directions, a "hard-wired" choice can be made for combining 4 out of 8 coils into 2 channels. This is the gist of the invention.

Fig. 3 shows a first embodiment of a combination of RF signals from RF coils for an RF coil system comprising 8 RF coils 11-18. For all these embodiments it is assumed that 6 receiver channels are available, but the generalization to more or less RF coils and/or receiver channels can easily be made by those skilled in the art. To map the RF signals of the 8 RF coils 11-18 onto these 6 receiver channels, two pairs of two RF coils are formed, the RF signals of which are each combined into a single receiver channel, while the RF signals of the remaining four RF coils are each inputted into a separate single receiver channel.

According to the first embodiment shown in Fig. 3, the RF signals of RF coils 12 and 16 are combined into one receiver channel, and the RF signals of RF coils 14 and 18 are combined into one receiver channel. The remaining RF coils remain individually and are separately connected to the four remaining receiver channels. In this embodiment the RF

signals of RF coils, which are arranged obliquely to the anterior/posterior (AP) and left/right (LR) axes, are combined, while the RF signals of RF coils 11, 13, 15, 17, which are arranged parallel or orthogonally to said directions, remain individual.

5 In the second embodiment shown in Fig. 4 the RF signals of RF coils 12 and 16, and the RF signals of RF coils 14 and 18 are combined into separate receiver channels. Such an asymmetric combination would be preferred if, for instance, the AP direction is selected as SENSE reduction direction. In this case such a combination would be advantageous when considering phase behaviour. As can be seen, the RF coils 13 and 17 of the first pair are arranged parallel to the SENSE reduction direction, while the RF coils 12 and 16 of the second pair are arranged obliquely to the SENSE reduction direction, but are  
10 located next to the coils 17 and 13 of the first pair.

A more symmetric combination is shown in Fig. 5. Therein RF signals of RF coils 12 and 18 are combined and RF signals of RF coils 14 and 16 are combined into a separate receiver channel. When selecting the AP direction as SENSE reduction direction, also in this case the arrangement of the RF coils 12, 14, 16 and 18, the RF signals of which are combined in pairs, are arranged obliquely to the SENSE reduction direction. However, contrary to the embodiment shown in Fig. 3, one RF coil of each pair is parallel to one RF coil of the other pair.

A fourth embodiment is schematically shown in Fig. 6. Therein RF signals of  
20 RF coils 13 and 14 are combined and RF signals of RF coils 17 and 18 are combined into a separate single receiver channel. It has been shown in practise that such a combination of adjacent RF coils, particularly with a 90° phase shift, leads to a high SNR.

It is noted that the embodiments of an MRI apparatus comprising an RF coil system having 8 RF coils as shown and described above shall be understood as particular  
25 examples which shall not restrict the invention to such a particular RF coil system. In contrast, the invention is applicable to any MRI apparatus comprising an RF coil system where the number of RF coils is higher than the number of receiver channels. Furthermore, the combination of coils can also differ from the combinations shown and described above. In general, the individual coil array elements shall be aligned as much as possible along the  
30 principle SENSE reduction direction for the main anatomy of interest.

In a head coil arrangement, where the imaging plane is often tilted some 20° around the LR axis, the RF coils covering the AP direction shall be in line with this orientation. In applications like cardiac imaging the individual RF coils should optimally



views and their respective foldover or SENSE reduction direction. It can be envisaged to automatically move and select the optimally positioned RF coils to optimize the geometry factor. This depends on the starting point of the geometry of the individual RF coils.

- 5 Provided the RF coil system comprises two rings of four RF coils to be combined with 6 receiver channels, the RF coils at the right anterior and/or posterior parts of the body are expected not to contribute much to the required sensitivity for a long axis view. These can, for example, be combined. However, this needs some additional investigation depending on the size of the RF coils and their topology. In general the RF coils are combined for reasons of, for example, legacy support of older MR systems having less receive channels than the
- 10 number of RF coil elements in such a way that the remaining combined RF coils do feature as much spatial distinctness as possible along the axes of primary clinical interest.

## ABSTRACT:

EPO - DG 1  
21.06.2002  
(54)

BEST AVAILABLE COPY

1. A magnetic resonance imaging apparatus comprising:
  - an RF coil system comprising M RF coils for detecting RF signals from a region of interest, M being an integer larger than 2, and
  - N receiver channels for receiving and processing the detected RF signals, N being an integer larger than 1 and smaller than M,characterized in that at least two RF coils are combined for reception of RF signals of said RF coils with a single receiver channel, wherein said at least two RF coils are selected so as to provide maximum spatially varying coil sensitivities along the principal axis for coil sensitivity encoding.
2. A magnetic resonance imaging apparatus as claimed in claim 1, characterized in that pairs of two RF coils are each combined and connected to a separate receiver channel, wherein at least one RF coil is not combined with any other RF coil.
3. A magnetic resonance imaging apparatus as claimed in claim 1, characterized in that said RF coil system comprises 8 RF coils, wherein 6 receiver channels are provided and wherein pairs of two RF coils are each combined for reception of RF signals of said pairs of RF coils with two separate receiver channels, respectively.
4. A magnetic resonance imaging apparatus as claimed in claim 3, characterized in that said 8 RF coils are arranged in the shape of a ring, in particular forming a birdcage head coil arrangement.
5. A magnetic resonance imaging apparatus as claimed in claim 3, characterized in that pairs of two RF coils are each combined which are arranged obliquely to the principal axes for sensitivity encoding, in particular the anterior-posterior and left-right axes.
6. A magnetic resonance imaging apparatus as claimed in claim 5, characterized in that the RF coils of a first pair are arranged parallel to each other and the RF coils of a

second pair are arranged parallel to each other and orthogonally to the RF coils of the first pair.

7. A magnetic resonance imaging apparatus as claimed in claim 5, characterized in that the RF coils of a first pair are arranged orthogonally to each other and the RF coils of a second pair are arranged orthogonally to each other, wherein each of said RF coils of the second pair is arranged parallel to one RF coil of the first pair.

8. A magnetic resonance imaging apparatus as claimed in claim 3, characterized in that the RF coils of a first pair are arranged parallel to the principal axis for sensitivity encoding and the RF coils of a second pair are arranged obliquely to the principal axis for sensitivity encoding.

9. A magnetic resonance imaging apparatus as claimed in claim 8, characterized in that the RF coils of said first or said second pair, respectively, are neighboring each other.

10. A magnetic resonance imaging apparatus as claimed in claim 8, characterized in that the RF coils of said first or said second pair, respectively, are parallel to each other.

11. A magnetic resonance imaging method comprising the steps of:

- detecting RF signals from a region of interest using an RF coil system comprising M RF coils, M being an integer larger than 2, and
- receiving and processing the detected RF signals using N receiver channels, N being an integer larger than 1 and smaller than M,

characterized in that at least two RF coils are combined for reception of RF signals of said RF coils with a single receiver channel, wherein said at least two RF coils are selected so as to provide maximum spatially varying coil sensitivities along the principal axis for coil sensitivity encoding.

## ABSTRACT:

5 The present invention relates to a magnetic resonance imaging apparatus  
comprising an RF coil system comprising M RF coils (11-18) for detecting RF signals from a  
region of interest, M being an integer larger than 2, and N receiver channels (C1-C4) for  
receiving and processing the detected RF signals, N being an integer larger than 1 and  
smaller than M. According to the invention at least two RF coils (12, 16; 14, 18) are  
combined for reception of RF signals of said RF coils with a single receiver channel, wherein  
said at least two RF coils are selected so as to provide maximum spatially varying coil  
sensitivities along the principal axis for coil sensitivity encoding.

10 The proposed MRI apparatus provides an optimal solution for the use with the  
SENSE method. The general idea is to have as much individuality as possible along the  
preferred or actual sense reduction direction and to feature as much spatial distinctness as  
possible along the axes of primary clinical interest.

Fig. 3

BEST AVAILABLE COPY

EPO - DG 1  
21. 06. 2002

(51)

EPO - DG  
21. 06. 2002  
(54)

BEST AVAILABLE COPY

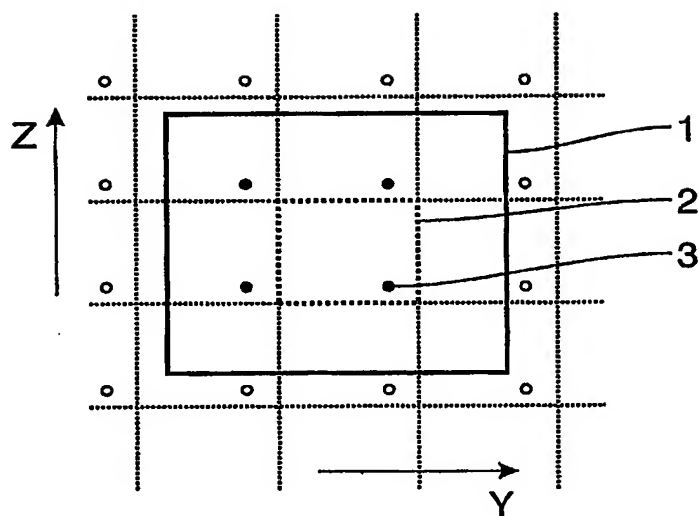


FIG.1

BEST AVAILABLE COPY

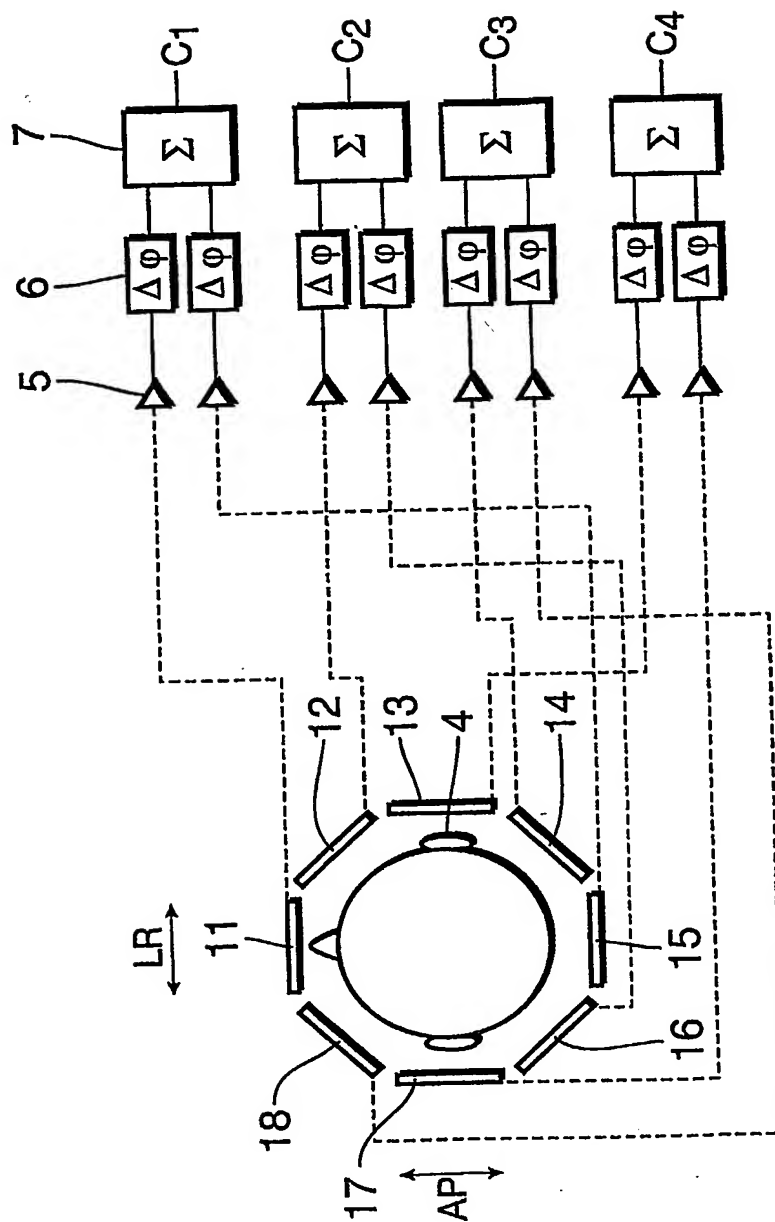


FIG.2

3/4

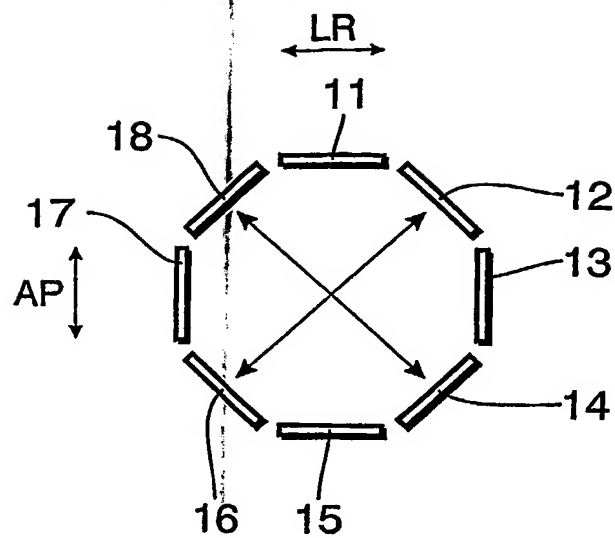


FIG. 3

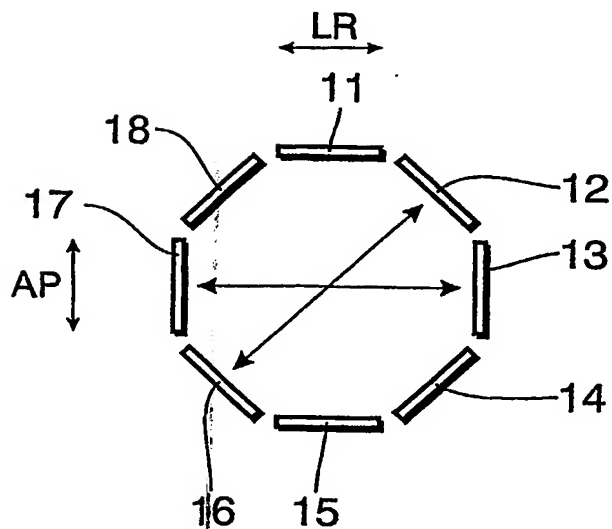


FIG. 4

BEST AVAILABLE COPY

4/4

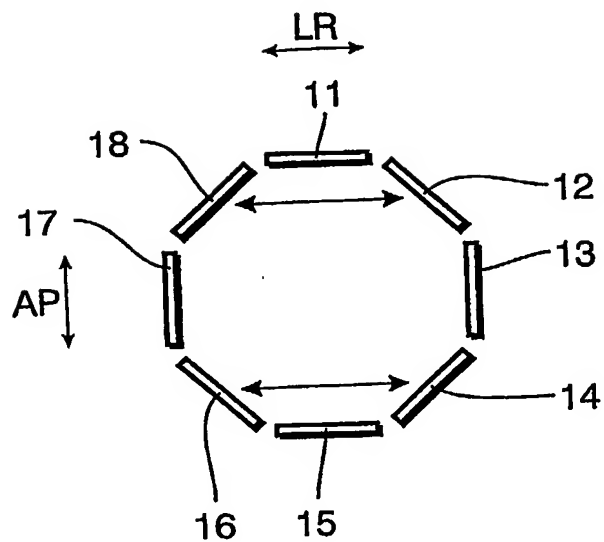


FIG. 5

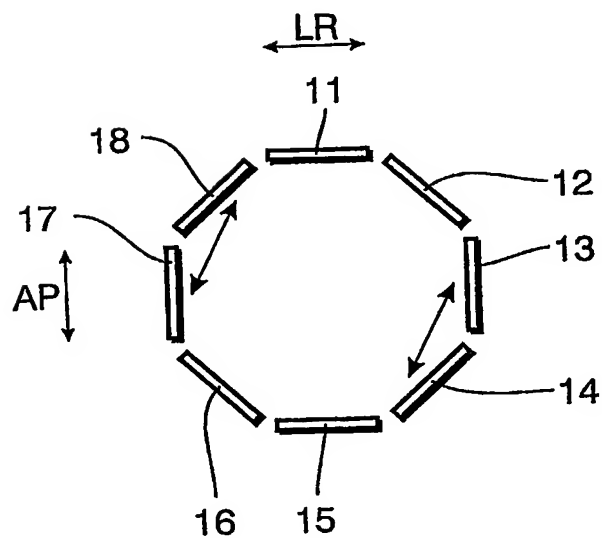


FIG. 6

BEST AVAILABLE COPY



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**